



Product description

Each Vanguard Totally Enclosed Lifeboat is designed and manufactured to SOLAS 86 regulation, and also adheres closely to stringent governmental requirements.

Launched via conventional davits, these lifeboats are designed to evacuate crew - safely and efficiently - from vessels and offshore platforms. These lifeboats also come fully-equipped with the latest Spearhead On-Off load hook release systems incorporating the Fall Preventive Device (FPD), which are both user-friendly and easy to maintain.


Vanguard ensures easy access to critical spares and expert maintenance services for all major areas, including the engine, gearbox, steering systems, compressed air and water systems, through our global after-sales service network. Recertification as per SOLAS requirements is also available at most major ports.

Dry cargo version


Model	Dimensions	Capacity	Speed	Hook Distance	Weight Unloaded	Full Loaded
VG7.5C	7.50 x 2.86 x 3.10m	66p	> 6 knots	7.10m	3220kg	8170kg
VG8.5C	8.50 x 3.20 x 3.30m	85p	> 6 knots	8.00m	4354kg	10729kg
VG11.95C	11.95 x 3.85 x 3.70m	150p	> 6 knots	11.28m	5680kg	16930kg

Tanker version

Model	Dimensions	Capacity	Speed	Hook Distance	Weight Unloaded	Full Loaded
VG7.5F	7.50 x 2.86 x 3.10m	66p	> 6 knots	7.10m	3500kg	8450kg
VG8.5F	8.50 x 3.20 x 3.30m	85p	> 6 knots	8.00m	4685kg	11060kg
VG11.95F	11.95 x 3.85 x 3.70m	150p	> 6 knots	11.28m	6100kg	17350kg

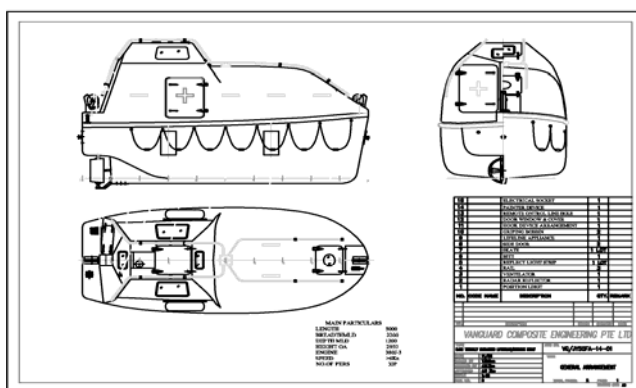

Classification Societies



Vanguard Composite Engineering Pte Ltd

151 Chin Swee Road, #03-14 Manhattan House Singapore 169876

Tel: +65 6887 5034 Fax: +65 6887 5043

www.vanguardce.biz sales@vanguardce.biz

Sales Agent

